

Messrs.

Sebango code: AZ	MH	PT
Assy / B1:		
TB / C1:		
Pack / F1:		
Prod.Eng:		
Data:		

Drawing No.	G2-14310-0090(1/3)
DATE	Jun. 15th, 2005
Revision No.	
Revision Date	
Design model ID	714310A
Product. model ID	114310A

Engine Specification

For L100V6CA1T1AA

(Standard for General use : Starting motor)

Contents		
Engine specifications		G2-14310-0090(2/3)
Engine performance		G2-14310-0090(2/3)
Details of specifications		G2-14310-0090(3/3)
Attached	Outline	B2-14310-0090
	Labels	G2-14210-2010
	Performance curve	G2-14310-1010
	Tools	C2-14110-0010
	Wiring	E2-14110-0010

Revision	



YANMAR CO.,LTD.

Engineering Dept.		
Manager 17/06/05	Checked	Drawn
<i>M. Dujovana</i>	S. Nishimura	S. Hitosugi

Revision No.			
--------------	--	--	--

G2-14310-0090 (2/3)

1.Engine Specification

Model name			L100V6CA1T1AA
Type			4-stroke,vertical-cyl,air-cooled diesel
Combustion system			Direct injection
No. of cyl.-bore × stroke		mm	1- φ 86 × 75
Displacement		liter	0.435
Output	Continuous	kW/min ⁻¹	6.2 (8.4PS,8.3HP) / 3600
	Maximum	kW/min ⁻¹	6.8 (9.3PS,9.1HP) / 3600
PTO Shaft	PTO position		Crankshaft
	Direction of rotation		Counterclockwise viewed from PTO side
Injection Timing (FIC-air)		deg.	BTDC.15.5 ± 0.5
Fuel	Oil selection		Diesel fuel
	Tank capacity	liter	5.4
Lubricating	Oil selection		SAE 10W30,API grade CD or higher
	Oil capacity	liter	1.6 (effective,0.6)
Cooling system			Forced air cooling by flywheel fan
Starting system			Starter motor with re-coil starter
Governor			All speed type, mechanical
Balancer shaft			Single balancer shaft
Air cleaner			Dry type paper element filter
Exhaust silencer			Expansion silencer with cover
Generator (at 3600min ⁻¹)			Flywheel dynamo :12V-15A
Dimensions		mm	Indication in outline drawing
Dry weight		kg	Approx. 53.5

2.Engine performance

Speed at no load	Minimum	min ⁻¹	1200 or more	PTO Shaft (Without minimum idling speed adjust bolt. Adjustable figure by your end.)
	Maximum		3800 ± 30	
Governor regulation	Instantaneous speed difference	%	8 or less	
	Permanent speed change		5 or less	
	Recovery time	sec.	5 or less	
	Speed fluctuation	min ⁻¹	30 or less	
Permissible angle of inclination	Continuous	deg.	20	Operation of up to 3 minutes
	Intermittent		30	
Lowest start temperature	Re-coil starting	°C	0	Without starting aid agent
	Electric starting		-10	
Noise level at continuous rating output		dB(A)	97	Mean of four direction distance:1m with STD Silencer on

Revision No.			
--------------	--	--	--

G2-14310-0090 (3/3)

3.Details of specifications (STD SPEC. L100V6CA1T1AA)

System	Part name	Code	STD Spec.	Specification	Remarks
Fuel System	Fuel tank	Bm-a	1	same as STD.	Color : Yanmar Black
	Tank stay (A)		114210-55210	same as STD.	
	Tank stay (B)		114310-55230	same as STD.	
	Fuel injection Nozzle		714310-53100	same as STD.	
Lubricating System	Oil pressure switch	Cm-a	NA	same as STD.	
Cooling System	Flywheel	Dm-a	114699-21590	same as STD.	DE Type
	Fan case	Dm-b	114310-45100	same as STD.	Color : Gold Silver
	Eng cover	Dm-c	1	same as STD.	
Electric System	Electric Regulator & Harness, wire	-	114399-77550	same as STD.	For 12V-15A
	Dynamo Assy.	-	114399-78260	same as STD.	12V-15A
	Air heater	Em-a	NA	same as STD.	
PTO&Flange	Crankshaft	Fm-a	1	same as STD.	E-D type
	Crank case cover	-	114310-01450	same as STD.	E-D type
Intake and Exhaust System	Air cleaner	Gm-a	1	same as STD.	Lower Intake type
	Intake bend	Gm-b	NA	same as STD.	
	Silencer	Gm-c	1	same as STD.	
Starting System	Recoil starter Assy.	Hm-a	1	same as STD.	
	Starting motor	Hm-b	114362-77011	same as STD.	
Speed Control System	Control device Assy.	1m-a	1	same as STD.	General type
	Governor lever Assy.	-	114310-61500	same as STD.	
	Fuel limiter Assy.	-	114771-66600	same as STD.	Wax type
Decomp system	Bonnet	Lm-a	1	same as STD.	
Remarks	Fuel oil limiter : Tamper Proof Protect High idle adjust bolt : Locked by wire Lubricating Oil : Not provided Regulator Spring Position : 1-B Fuel Pump Model :L4B Recoil Angle : R5				
Loose parts	Key switch panel CMP		-	114351-77500	
	Deflector		-	114699-13800	
	Tools		-	114299-92590	

LABELS

G2-14210-2010

No.	L A B E L S	P L A C E	C O N T E N T S
1	LABEL, ENGINE NAME	COVER (CYLINDER	_____
2	LABEL, YANMAR MARK (A	F. O. TANK	THE FOLLOWING DETAILS
3	LABEL, CAUTION	F. O. TANK	//
4	LABEL, HOW TO START	F. O. TANK	//
5	LABEL, YANMAR MARK (B	FANCASE, COOLING	//
6	LABEL, DIESEL	RECOIL STARTER	//
7	EPA/ARB-OR LABEL	FANCASE, COOLING	//
8	LABEL, DECOMP	COVER, TOP	//


○ LABEL, YANMAR MARK (A




○ LABEL, YANMAR MARK (B



○ LABEL, CAUTION

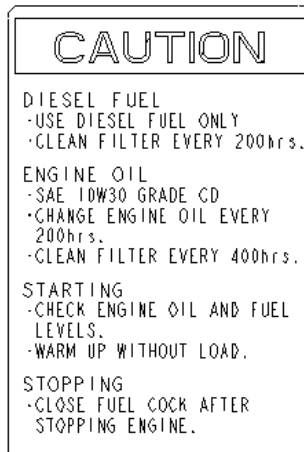



○ LABEL, DIESEL

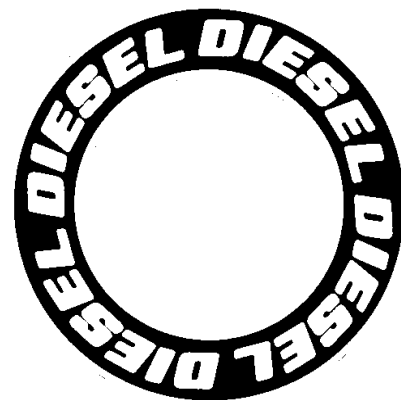

○ LABEL, HOW TO START

○ EPA/ARB-OR LABEL


○ LABEL, DECOMP

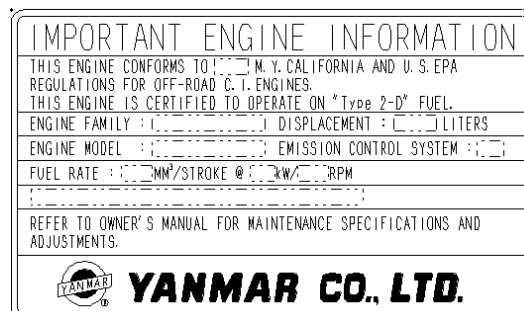

PERFORMANCE CURVES

G2-14310-1010






L 1 0 0 V


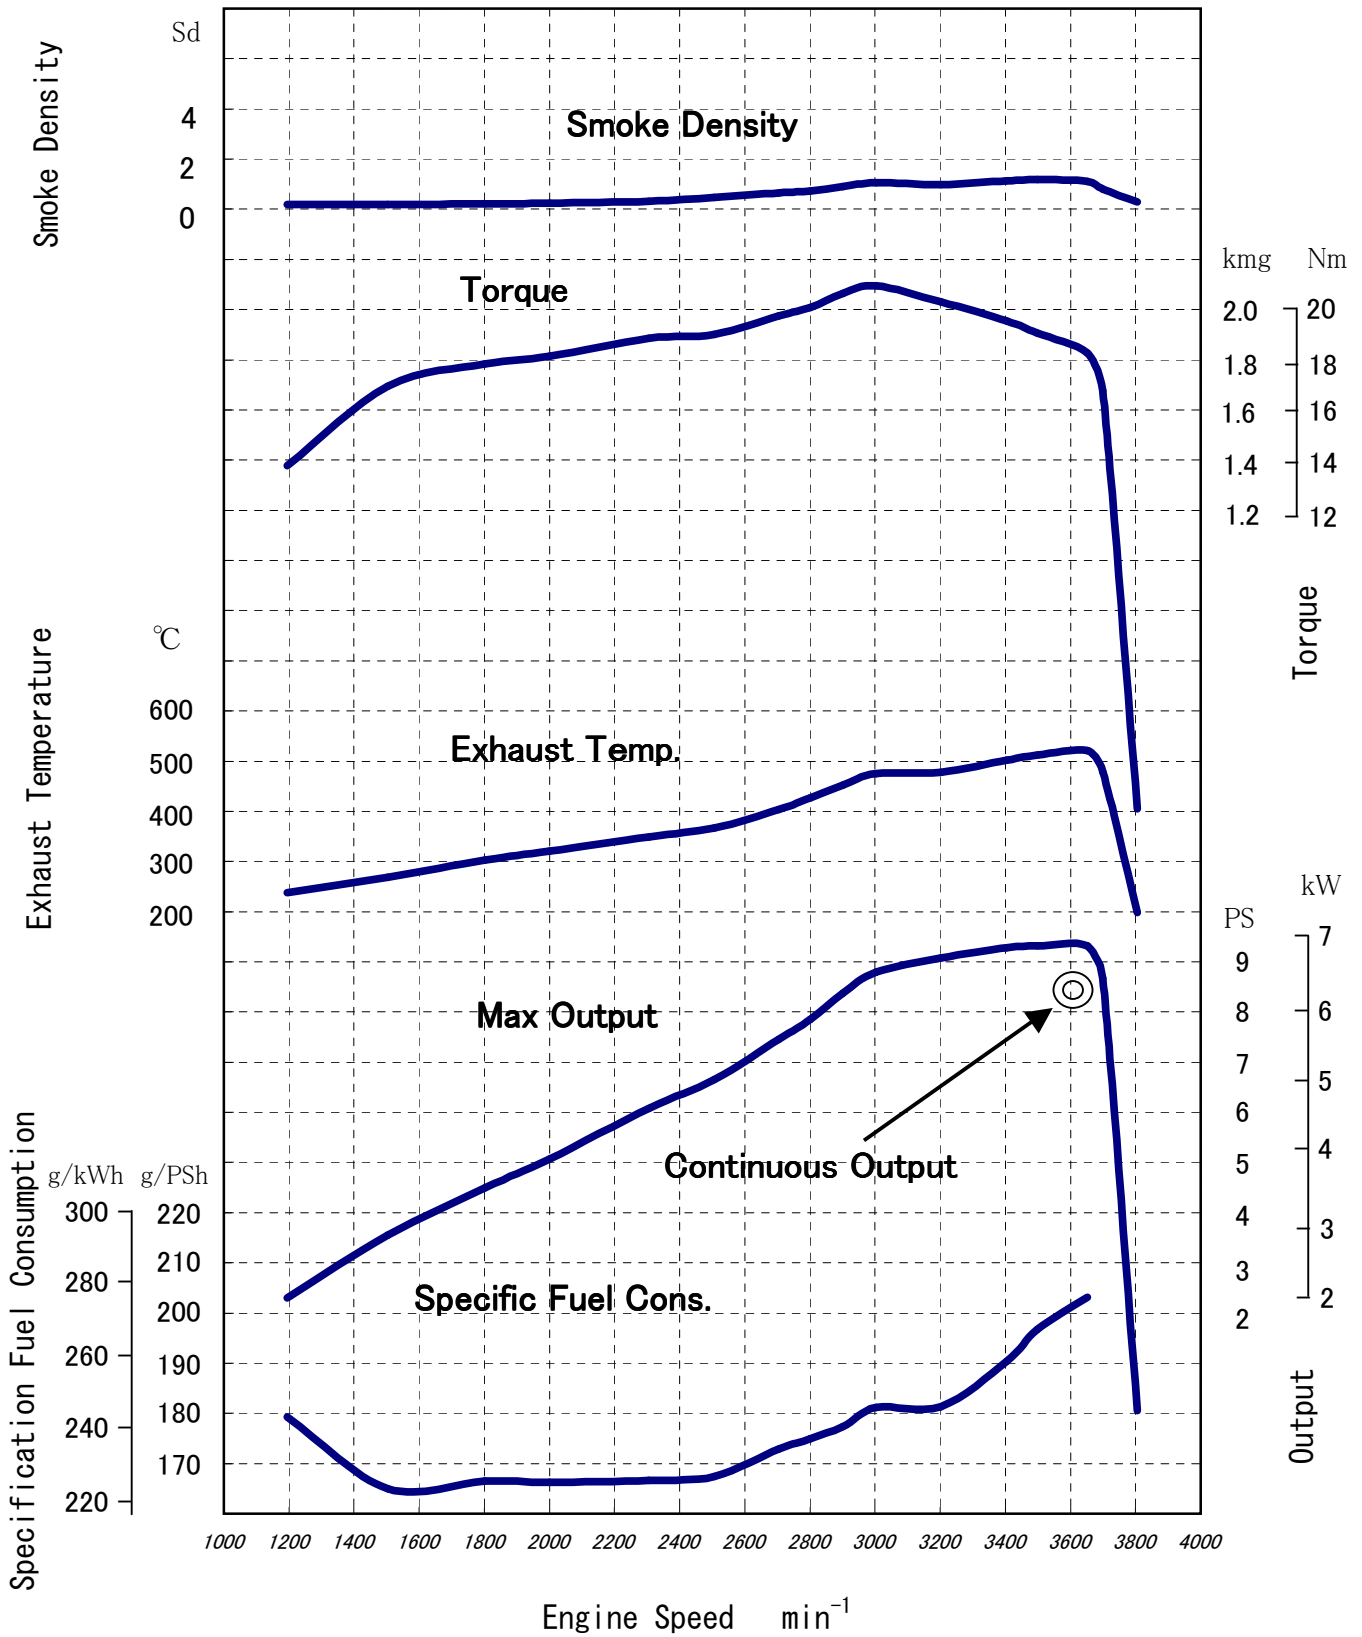


Notes : This performance is under the following condition.
 After 30hrs. initial running
 Atmospheric conditions : Temperature 298K (25°C)
 Pressure 100kPa (750mmHg)
 Humidity 30%

標準工具 TOOLS

C2-14110-0010

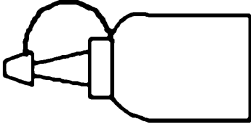区分 ITEM	名称 DESCRIPTION	部品コード及び略図 PART NUMBER	材質 MATERIAL	個数 Q'ty	備考 NOTES
工 具	1 両口スパナ WRENCH 14×17	114299-92720 	UNI EN 10083/1 C40	1	L=163
	2 両口スパナ WRENCH 10×12	114299-92710 	UNI EN 10083/1 C40	1	L=128
	3 油さし FEEDER, OIL	114299-92740 	合成樹脂 POLYETHYRENE	1	
	4 +-ねじまわし SCREWDRIVER	114299-92730 	UNI EN 10083/1 C40 & 合成樹脂 PVC	1	
	5 工具袋 BAG, TOOL	114299-92600 	黒色ビニール PVC	1	

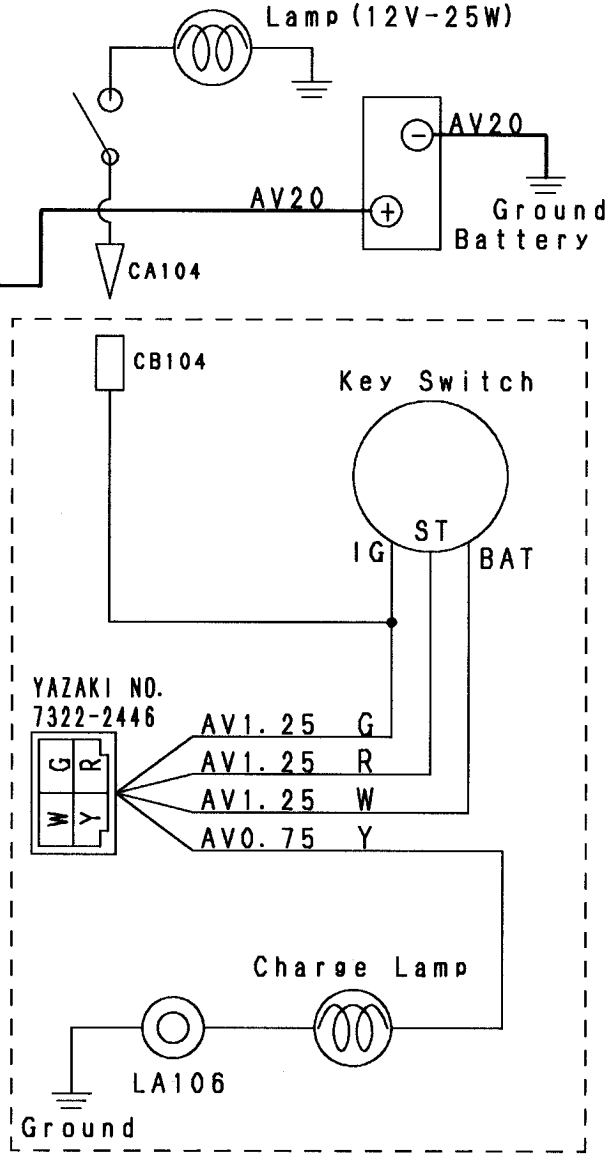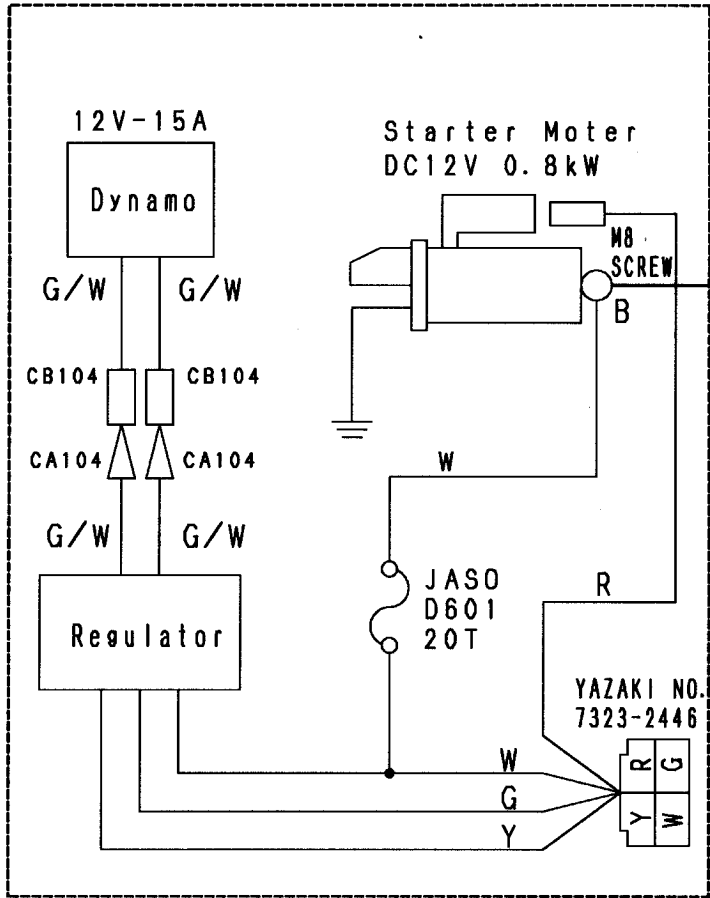

How Key Switch Function

	IG	BAT	ST	NOTE
OFF				
1	○—○			AUTO
2	○—○—○			↑

* G:Green
W:White
Y:Yellow
R:Red

NOTE:

1. Be sure to ground both engine and engine-driven machine
2. Section enclosed with dotted square is pre-wired at Yanmar factory.
Section enclosed with alternate long and short dash line is the section included in engine packing.
For this section, purchaser is expected to:
 - 1) connect 4P coupler.
 - 2) secure charge lamp ground (LA106) with bolt (M6)
 - 3) Receptacle of pin-type terminal (CB104) outputs up to 12V/25W.
3. Locally procure
 - 1 battery (24AH-36AH)
 - 2 battery cable (AV20)
 - 3 lamp (12V-25W), switch and cable (AV1. 25)